

12

EUROPEAN PATENT APPLICATION

21 Application number: 89115895.8

51 Int. Cl.⁵: **B41M 5/26**

22 Date of filing: 29.08.89

30 Priority: 31.08.88 US 238653

43 Date of publication of application:
07.03.90 Bulletin 90/10

84 Designated Contracting States:
AT BE CH DE ES FR GB GR IT LI LU NL SE


71 Applicant: **EASTMAN KODAK COMPANY**
343 State Street
Rochester New York 14650(US)

72 Inventor: **Byers, Gary Wayne c/o Eastman Kodak Company**
Patent Department 343 State Street
Rochester New York 14650(US)
Inventor: **Chapman, Derek David c/o Eastman Kodak Company**
Patent Department 343 State Street
Rochester New York 14650(US)

74 Representative: **Brandes, Jürgen, Dr. et al**
Wuesthoff & Wuesthoff Patent- und
Rechtsanwälte Schweigerstrasse 2
D-8000 München 90(DE)

54 Thermally-transferable fluorescent 7-aminocoumarins.

57 A donor element for thermal transfer comprising a support having on one side thereof a fluorescent 7-aminocoumarin compound dispersed in a polymeric binder, and on the other side thereof a slipping layer comprising a lubricant. In a preferred embodiment, the compound has the formula:



wherein:

each X and Y independently represents hydrogen; a substituted or unsubstituted alkyl or acyl group having from 1 to 10 carbon atoms; a substituted or unsubstituted aryl group having from 6 to 10 carbon atoms; or the atoms necessary to complete, along with the nitrogen to which it is attached, a 5- or 6-membered heterocyclic ring.

EP 0 356 981 A2

THERMALLY-TRANSFERABLE FLUORESCENT 7-AMINOCOUMARINS

This invention relates to fluorescent donor elements used in thermal transfer.


In recent years, thermal transfer systems have been developed to obtain prints from pictures which have been generated electronically from a color video camera. According to one way of obtaining such prints, an electronic picture is first subjected to color separation by color filters. The respective color-separated images are then converted into electrical signals. These signals are then operated on to produce cyan, magenta and yellow electrical signals. These signals are then transmitted to a thermal printer. To obtain the print, a cyan, magenta or yellow dye-donor element is placed face-to-face with a dye-receiving element. The two are then inserted between a thermal printing head and a platen roller. A line-type thermal printing head is used to apply heat from the back of the dye-donor sheet. The thermal printing head has many heating elements and is heated up sequentially in response to the cyan, magenta and yellow signals. The process is then repeated for the other two colors. A color hard copy is thus obtained which corresponds to the original picture viewed on a screen. Further details of this process and an apparatus for carrying it out are contained in U.S. Patent No. 4,621,271.

The system described above has been used to obtain visible dye images. However, for security purposes, to inhibit forgeries or duplication, or to encode confidential information, it would be advantageous to create non-visual ultraviolet absorbing images that fluoresce with visible emission when illuminated with ultraviolet light.

U.S. Patent 4,627,997 discloses a fluorescent thermal transfer recording medium comprising a thermally-meltable, wax ink layer. In that system, the fluorescent material is transferred along with the wax material when it is melted. Wax transfer systems, however, are incapable of providing a continuous tone. Further, the fluorescent materials of that reference are incapable of diffusing by themselves in the absence of the wax matrix. It is an object of this invention to provide fluorescent materials useful in a continuous tone system which have sufficient vapor pressure to transfer or diffuse by themselves from a donor element to a dye-receiver.

These and other objects are achieved in accordance with this invention which comprises a donor element for thermal transfer comprising a support having on one side thereof a fluorescent 7-aminocoumarin compound dispersed in a polymeric binder, and on the other side thereof a slipping layer comprising a lubricant.

In a preferred embodiment of the invention, the compound has the formula:



wherein:

- each X and Y independently represents hydrogen; a substituted or unsubstituted alkyl or acyl group having from 1 to 10 carbon atoms, such as $-CH_3$, $-C_2H_5$, $-C_2H_4OCH_3$, $-C-C_3H_7$, $-COCH_3$, or $-CF_3$; a substituted or unsubstituted aryl group having from 6 to 10 carbon atoms such as $-C_6H_5$, $-C_6H_4(p-OCH_3)$, $-C_6H_4(o-CO_2CH_3)$, or $-C_6H_4(p-Cl)$; or the atoms necessary to complete, along with the nitrogen to which it is attached, a 5- or 6-membered heterocyclic ring, such as



25

30

35


40

45

50

55

5



10

CompoundR¹R²R³


1

-H

-CH₃N(C₂H₅)₂

15

2



-H

N(C₂H₅)₂

20

3

-H

-CH₃-NH₂

4

-H


-CF₃N(CH₃)₂

25

5


-C₆H₅

-H



30

6



-H

-N(C₂H₅)₂

40

7

-COCH₃

-H

-N(C₂H₅)₂

45

8

-H

-CH₃-N(CH₃)₂


50

9

-N(CH₃)₂

55

5





10

Compound




15

10





20

11




25

12





30

14




35

15




40

17





18




45

19




50


20




55

21









Compound	R^4	R^5
22	-H	-CF ₃
23	-COCH ₃	-H
24	-COC ₆ H ₅	-H
25	-H	-nC ₃ H ₇
26	-H	-CH ₃
27	-CN	-H
28	-CO ₂ C ₂ H ₅	-H
29		




	<u>R⁶</u>	<u>R⁷</u>	<u>R⁸</u>
30	-H	-CF ₃	-H
31	-H	-CF ₃	-C ₂ H ₅
32	-H	-CH ₃	-H
33	-CH ₃	-CH ₃	-CH ₃

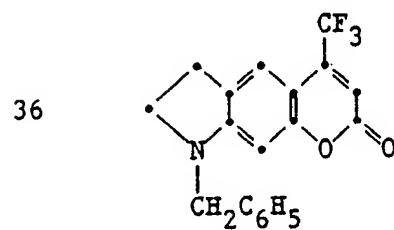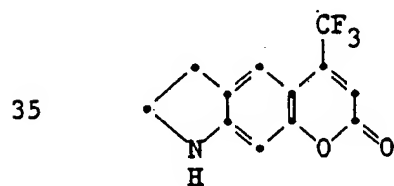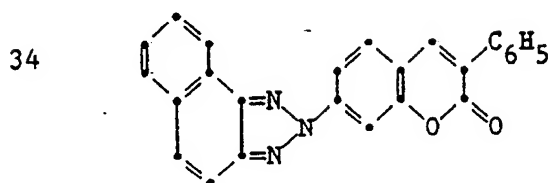


37

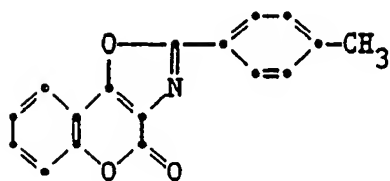


38

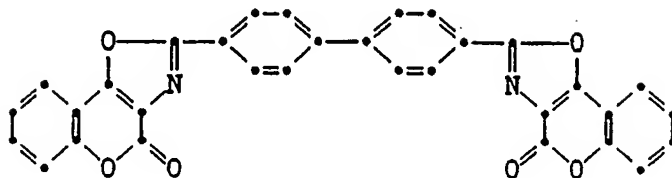


39

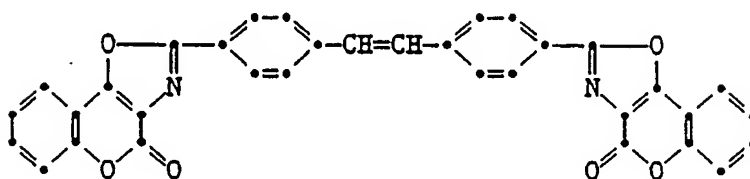

40

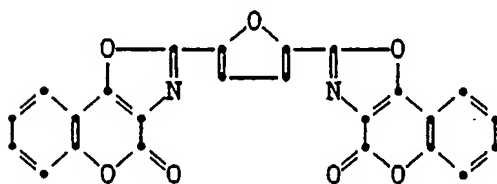

41

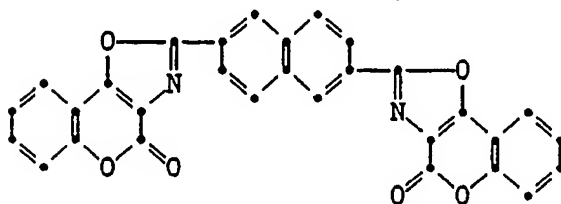

A visible dye can also be used in a separate area of the donor element of the invention provided it is transferable to the dye-receiving layer by the action of heat. Especially good results have been obtained with sublimable dyes such as



25

30

35

40

45

50

55

9

(ethylene terephthalate). The support for the receiving element may also be reflective such as baryta-coated paper, polyethylene-coated paper, white polyester (polyester with white pigment incorporated therein), an ivory paper, a condenser paper or a synthetic paper such as duPont Tyvek®.

The image-receiving layer may comprise, for example, a polycarbonate, a polyurethane, a polyester, polyvinyl chloride, poly(styrene-co-acrylonitrile), poly(caprolactone) or mixtures thereof. The image-receiving layer may be present in any amount which is effective for the intended purpose. In general, good results have been obtained at a concentration of from 1 to 5g/m².

As noted above, the donor elements of the invention are used to form a transfer image. Such a process comprises imagewise-heating a donor element as described above and transferring a fluorescent material image to a receiving element to form the transfer image.

The donor element of the invention may be used in sheet form or in a continuous roll or ribbon. If a continuous roll or ribbon is employed, it may have only the fluorescent material thereon as described above or may have alternating areas of different dyes, such as sublimable magenta and/or yellow and/or cyan and/or black or other dyes. Such dyes are disclosed in U. S. Patents 4,541,830, 4,698,651, 4,695,287, 4,701,439, 4,757,046, 4,743,582, and 4,753,922. Thus, one-, two-, three- or four-color elements (or higher numbers also) are included within the scope of the invention.

In a preferred embodiment of the invention, the donor element comprises a poly(ethylene terephthalate) support coated with sequential repeating areas of magenta, yellow, and cyan dye and the fluorescent material as described above, and the above process steps are sequentially performed for each color to obtain a three-color dye transfer image containing a fluorescent image.

A thermal transfer assemblage of the invention comprises

- a) a donor element as described above, and
- b) a receiving element as described above, the receiving element being in a superposed relationship with the donor element so that the fluorescent material layer of the donor element is in contact with the image-receiving layer of the receiving element.

The following example is provided to illustrate the invention.

Example

A donor element was prepared by coating the following layers in the order recited on a 6 µm poly(ethylene terephthalate) support:


- 1) a subbing layer of duPont Tyzor TBT® titanium tetra-n-butoxide (0.16 g/m²) from 1-butanol; and
- 2) a layer containing the fluorescent material as identified above or control fluorescent material identified below (0.16 g/m² in a cellulose acetate propionate (2.5% acetyl and 45% propionyl) binder (0.32 g/m²) coated from a cyclopentanone, toluene and methanol solvent mixture. On the back side of the element was coated:

- 1) a subbing layer of Bostik 7650® (Emhart Corp.) polyester (0.11 g/m²) coated from toluene; and
- 2) a slipping layer of Gafac RA-600® (GAF Corp.) polymer (0.043 g/m²) and BYK-320® (BYK Chemie, USA) (0.016 g/m²) in a poly(styrene-co-acrylonitrile) binder (70:30 wt. ratio) (0.54 g/m²) coated from a toluene and 3-pentanone solvent mixture.

Control Materials

The following materials are available commercially from Kodak Laboratory Products and Chemicals Division:


Control 1



Fluorescein

5

10 Control 2

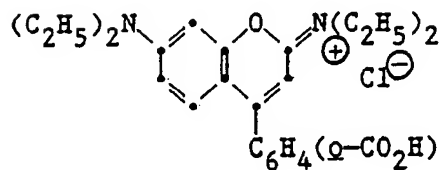


Rhodamine B

15

20

Control 3




DANS Acid

25

30

35 Control 4




Naphthol AS-B1
phosphate

40

45

Control 5




Coumarin

50

55

Control 6



4-methyl,
7-hydroxycoumarin

A receiving element was prepared by coating a solution of Makrolon 5705® (Bayer A.G. Corporation) polycarbonate resin (2.9 g/m²) in a methylene chloride and trichloroethylene solvent mixture on a transparent 175 µm polyethylene terephthalate support.

The fluorescent material layer side of the donor element strip approximately 3 cm x 15 cm in area was placed in contact with the image-receiving layer of the receiver element of the same area. The assemblage was fastened in the jaws of a stepper motor driven pulling device. The assemblage was laid on top of a 14 mm diameter rubber roller and a TDK Thermal Head L-133 (No. 6-2R16-1) and was pressed with a spring at a force of 3.6 kg against the donor element side of the assemblage pushing it against the rubber roller.

The imaging electronics were activated causing the pulling device to draw the assemblage between the printing head and roller at 3.1 mm/sec. Coincidentally, the resistive elements in the thermal print head were pulsed at a per pixel pulse width of 8 msec to generate a graduated density image. The voltage supplied to the print head was approximately 22 v representing approximately 1.5 watts/dot (12 mjoules/dot).

The receiving element was separated from the donor element and the relative emission was measured with a spectrofluorimeter using a fixed intensity 360 nm excitation beam. The following results were obtained:

Table

Compound	Relative Emission*	Visual Color
1	100	Blue
2	8	Yellow
3	32	Purple
4	38	Yellow
21	74	Blue
22	12	Yellow-Green
23	4	Yellow-Green
Control 1	0.3	Not visible
Control 2	0.3	Not visible
Control 3	0.3	Not visible
Control 4	0.1	Not visible
Control 5	0.8	Not visible
Control 6	0.2	Not visible


* Compared to Compound 1, normalized to 100

The above results show that the compounds of the invention have much more fluorescence than the control compounds of the prior art.

Claims

1. A donor element for thermal transfer comprising a support having on one side thereof a fluorescent 7-aminocoumarin compound dispersed in a polymeric binder, and on the other side thereof a slipping layer comprising a lubricant.

2. The element of Claim 1 characterized in that said compound has the formula:



5

wherein:

10 each X and Y independently represents hydrogen; a substituted or unsubstituted alkyl or acyl group having from 1 to 10 carbon atoms; a substituted or unsubstituted aryl group having from 6 to 10 carbon atoms; or the atoms necessary to complete, along with the nitrogen to which it is attached, a 5- or 6-membered heterocyclic ring.

3. The element of Claim 2 characterized in that X and Y are each hydrogen.

15 4. The element of Claim 2 characterized in that X and Y are each methyl.

5. The element of Claim 2 characterized in that X and Y are each ethyl.

6. The element of Claim 2 characterized in that X and Y each represent the atoms necessary to complete a 6-membered heterocyclic ring.

7. The element of Claim 1 characterized in that said donor element comprises sequential repeating
20 areas of magenta, yellow and cyan dye, and said fluorescent compound.

8. A process of forming a transfer image comprising imagewise-heating a donor element comprising a support having on one side thereof a layer comprising a material dispersed in a polymeric binder, and on the other side thereof a slipping layer comprising a lubricant, and transferring an image to a receiving element to form said transfer image, characterized in that said material is a fluorescent 7-aminocoumarin
25 compound.

9. A thermal transfer assemblage comprising:

a) a donor element comprising a support having on one side thereof a layer comprising a material dispersed in a polymeric binder, and on the other side thereof a slipping layer comprising a lubricant, and
b) a receiving element comprising a support having thereon an image-receiving layer,

30 said receiving element being in a superposed relationship with said donor element so that said material layer is in contact with said image-receiving layer, characterized in that said material is a fluorescent 7-aminocoumarin compound.

35

40

45

50

55